



MONOCRYSTALLINE SILICON | PHOTOVOLTAIC MODULES

525Wp - 545Wp



YEARS PRODUCT WARRANTY

91.2% Power Output Up To 12 Years



YEARS PERFORMANCE WARRANTY

80.7% Power Output Up To 30 Years

MADE IN
INDIA

- Australian Brand Manufactured in accordance with APS's high standards of design and Quality Control
- Positive tolerance that delivers higher output reliability for all our modules
- High module Output for better conversion efficiency
- EL Tested 100% dual EL inspection
- Excellent module & Solar cell efficiency
- Higher PV Energy yields even under Low light and cloudy conditions
- Premium quality raw material and advanced manufacturing processes guarantees the reliability of our modules
- PID resistant and increased module robustness to minimize micro-cracks



Web : www.australianpremiumsolar.co.in | Email : sales@australianpremiumsolar.co.in

ELECTRICAL TYPICAL VALUE

Model	APSAM-525/144	APSAM-530/144	APSAM-535/144	APSAM-540/144	APSAM-545/144
Maximum Power (Pmax)	525W	530W	535W	540W	545W
Maximum Power Voltage (Vmp)	41.54 V	41.76 V	41.99 V	42.21 V	42.46 V
Maximum Power Current (Imp)	12.64 A	12.69 A	12.74 A	12.79 A	12.84 A
Open Circuit Voltage (Voc)	48.76 V	48.91 V	49.06 V	49.21 V	49.37 V
Short Circuit Current (Isc)	13.29 A	13.33 A	13.37 A	13.42 A	13.46 A
Module Efficiency	20.35 %	20.53 %	20.73 %	20.91 %	21.12 %

MECHANICAL CHARACTERISTICS

Dimensions	2278 X 1133 X 40 MM *
Weight	28.25 Kg *


*NOTE : STC : Irradiance 1500W/m2 Module Temperature 25°C AM=1.5

TEMPERATURE CHARACTERISTICS

NOCT (Nominal Operation Temperature)	: 47 ± 2°C
Temperature Coefficient of Voc (β)	: -0.35%/°C
Temperature Coefficient of Isc (α)	: 0.05%/°C
Temperature Coefficient of Pmax (γ)	: -0.45%/°C

ABSOLUTE MAXIMUM RATING

Parameter	Values
Operating Temperature	From -40° to 85°C
Maximum Series Fuse Rating	25 A
Application Class	IEC & BIS APPROEVD
Maximum System Voltage	1500 Vdc

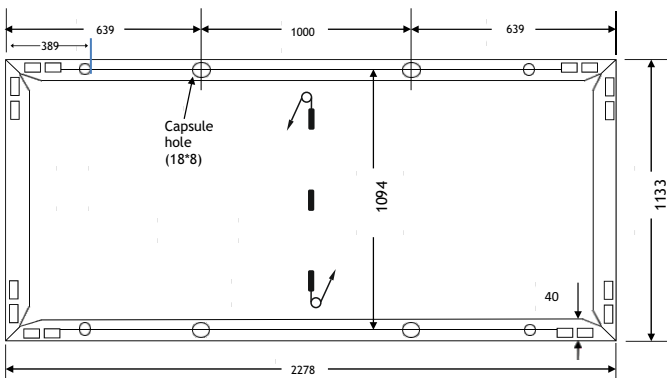

TEMPERATURE CHARACTERISTICS

Note :


The Specifications in this datasheet are subject subject to change without any notice.
 The Electrical data given here is for reference purpose only.
 Please contact our sales team for any customized solutions.
 Please read safety and installation instructions before using the product.
 Subject to Ahmedabad Jurisdiction.

*Warranty :


Please read APS India warranty documents thoroughly on <http://australianpremiumsolar.co.in/warranty/>

MODULE CHARACTERISTICS

Solar Cells	Half-cut mono crystallin
No.of Cells	144 Cells
Glass	Low Iron, tempered glass, 3.2 / 2.8 mm*
Frame	Anodized aluminum alloy
Junction Box	IP68
Cable & Plug Connectors	400MM X 4.0MM Mc4 compatible / IP 68
Maximum Snow Load	2400 Pascal
Maximum Wind Load	5400 Pascal
Hailstone Impact Test	80 km/h for 25mm ice ball

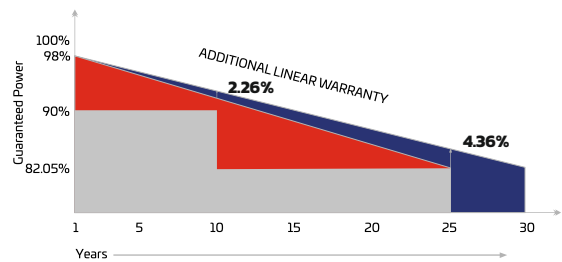

(Design In Australia | Manufactured in India)

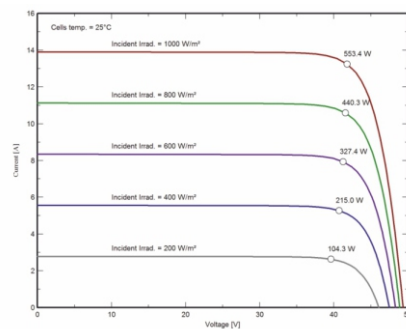

I-V-CURVE

Toll Free : 1800-313-5052

Corporate Office : 301, 3rd floor, Satyamev Eminence, Nr. Shukan Mall, Science City Road, Ahmedabad, Gujarat - 380060.

Factory : At & Post - Tajpur, N.H.-08, Ta - Prantij, Dist - Sabarkantha, Gujarat-383205 (India).

* The images shown are for illustration purposes only and may not be an exact representation of the product.